HP10-60HZ MICROFIX

Product code (Ue=400V)	IB3DBB216060987
Reactive power Ue=230V	16 kvar
Nominal voltage Ue	230V
Capacitors voltage Un	415 V
Capacitors max voltage Umax	455 V
Frequency	60 Hz
$THDI_R$%	≤20%
Load break switch	80 A
Icc	50 kA
IP degree	IP3X
Dimensions WxDxH	430x250x600mm
Weight	18 kg

Standard features

Max current overload In (bank)	1.3 In
Max current overload In (capacitors)	1,3 In (continuous)
Max overload Vn (bank)	1,1xUe
Max overload Vn (capacitors)	3xUn (for 1 minute)
Insulation voltage	690V
Temperature class (bank)	-5/+40°C
Temperature class (capacitors)	-25/+55°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Total losses	~ 2W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Generalities

Zink-passivated metallic enclosure painted with epossidic dust paint, colour RAL 7035.

Load-break switch with door interlock.

Fuses with high breaking power NH00-gG.

FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.

IP3X protection degree.

CRM25 single phase self-healing metallized polypropylene capacitor with Un=415V-50Hz (350V60Hz) rated voltage.

Discharge resistance.

Signal lamp power on.

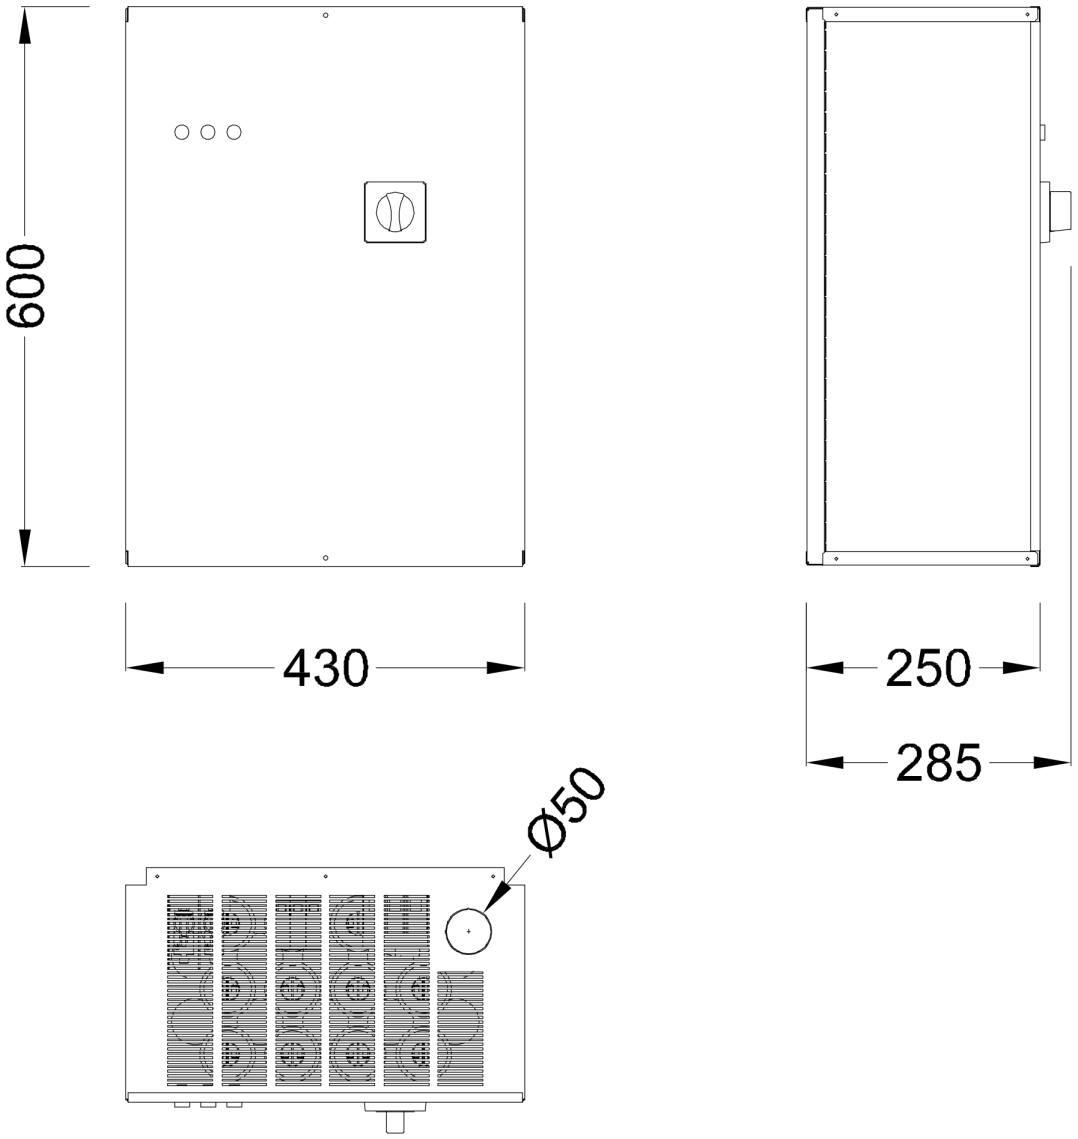
600
430
250
285
Ø50