




DZN0 K4 A IP21 1600

| | |
|---|--|
| Rated power | 1600 kVA |
| Frequency | 50 Hz |
| K Factor | 4 |
| Input voltage | 400 V |
| Output voltage | 400 V |
| Primary winding connection | Delta |
| Secondary winding connection | Zig-zag |
| Vector unit | Dzn0 |
| Core material | M270 magnetic steel |
| Winding material | Aluminium |
| Electrostatic shield | Between primary & secondary, connected to ground |
| Max ambient temperature | 40 °C |
| Insulation class | H |
| Insulation level | 3 kV |
| Thermal class | H |
| Temperature rise | 125 °C |
| Max altitude | 1000 m |
| Environmental - climate - fire class | E1 - C1 - F0 |
| Installation | Indoor |
| Protection degree | IP21 |
| Cabinet colour | RAL7012 |
| Reference Standards | EN 60076 / IEC 61558 (when applicable) |
| No-load current | <10% |
| In-rush current | 4 I _n |
| No-load losses | 6600 W |
| Load losses | 16400 W |
| Efficiency | 98.6 % |
| Vcc | 5 % |
| Dimensions L (W) x P (D) x H | 2000x1600x2000 mm |
| Weight | 4500 kg |



This image is indicative only.

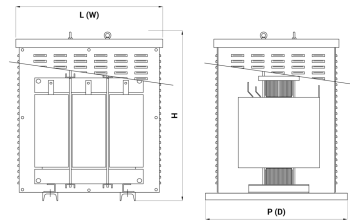

Drawing not in scale and indicative only.